


1U FIBER OPTICAL ROTARY PATCH PANEL - SW01-48SCA-xx

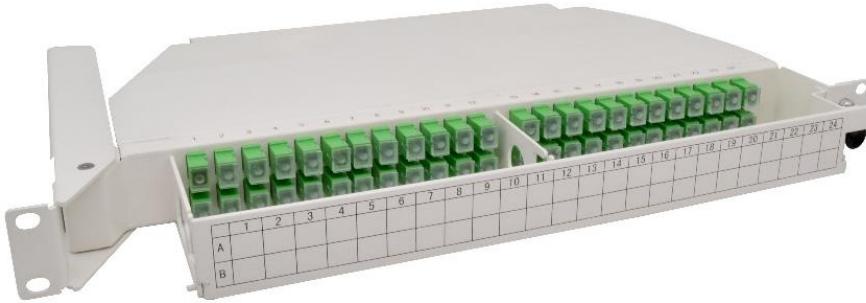

Browse on Mobile

 Browse on Web

Rotary Swing out patch panels are designed for the FTTH networks, specifically for the street cabinet where full front access is required. This 1U panel accommodates 48 SC/APC adapters and is loaded with bend insensitive pigtailed G657A2 and the complete splicing trays and routing.

FEATURES

- ✓ Holds up to 48 SC Simplex footprint adapters
- ✓ Designed for 19" and ETSI 21" frames
- ✓ Right and left opening
- ✓ Supplied fully loaded ready to splice

APPLICATIONS

- ✓ Datacenter storage area & Central office, POP
- ✓ Fiber to the home (FTTH) Street cabinets
- ✓ LAN/WAN

SPECIFICATIONS

Mounting Type	19" and compatible ETSI 21"
Opening Type	Right or Left Hinge swing out
Dimension	44 x 482 x 265mm
Material	Anticorrosive Steel and FR polymer
Housing Color	Painted light grey RAL7035
Operating Temperature	-25°C ~ +55°C (5 to 95% RH)
Net Weight	2.1kg

DESIGN - HARDWARE

Slot Type	SC/APC Simplex adapters
Number of Slots	48
Fiber Type	Single mode Bend Insensitive G657A2 Easystrip
Insertion Loss	IL ≤ 0,20dB / RL 65dB

ORDER INFORMATION

Part Number	Product Description
SW01-48SCA-LF	1U Pivot Panel 48FO SCA loaded Pigtails SC/APC OS2 G657A2 LSZH Easystrip, Opening Left
SW01-48SCA-RI	1U Pivot Panel 48FO SCA loaded Pigtails SC/APC OS2 G657A2 LSZH Easystrip, Opening Right