


CAT.5E STP MINI KEYSTONE JACKS - CN5ESTME/M

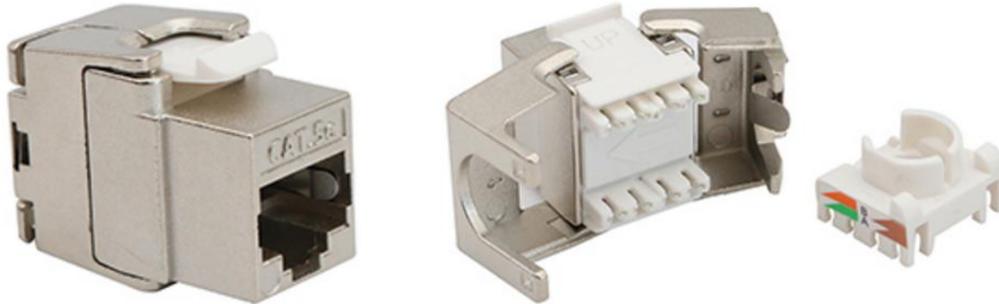

Browse on Mobile

 [Browse on Web](#)

NEXCONEC[®] Category 5E tool free RJ-45 Mini keystone jacks exceed the transmission line performance requirements of IEC and TIA for CLASS D/Category 5E systems. Each Category 5E tool free RJ-45 Mini keystone jacks comply with **IEC 60603-7-3** (shielded) and support all applications designed for CLASS D networks, as defined within **ISO/IEC 11801** (2nd Edition): 2010 including ATM-155, 100BASE-Tx, Token Ring 100Mbs-1, and 1G FCBASE-T.

FEATURES

- ✓ Easy and fast tool free termination
- ✓ Fits all keystone style face plates and floor boxes
- ✓ Shorter length for better cable routing inside backbox with faceplate
- ✓ Suitable for modular screened patch panel installation
- ✓ Support application with PoE, IEEE 802.3bt PoE++ Type 4

APPLICATIONS

- ✓ Support Class-D/Category 5E standards networks
- ✓ Terminates 23AWG to 26AWG conductors

SPECIFICATIONS

Parameters	Value
Shell Material	Zinc Die-Casting and Nickel plating
Plastic Parts	High quality engineering plastic
Jack Wire	Stamp Pin 0.35mm, Phosphor Bronze Gold over Nickel Plating
IDC Conductor	0.5mm Phosphor Bronze, Tin-plating
Jack Contact Life	Min. 750 Insertions
Contact Compatibility	Accommodate 22 to 24 AWG Solid
Wiring Block Life	Min. 200 term. cycles
PCB	FR-4, 1.2mm Thickness
Termination	180° Termination
Termination Wiring	TIA-568A or TIA-568B
TIA Cat.5E Perm. Link Test	Worst Pair NEXT Headroom ≥ 5.0 dB
Operating Temperature	-10°C / +60°C
Operating Humidity	10% ~ 90% RH
Storage Temperature	-40°C ~ +68°C
Application	Support application with PoE, IEEE 802.3bt PoE++ Type 4
Compliance	ANSI/TIA-568-C.2, ISO 11801, IEC 60603-7
RoHS	Compliant
Warranty	12 Months
Packing	25pcs per bag

ORDER INFORMATION

Product	Part Number	Product Description
	CN5ESTME/M	NEXCONEC CAT.5E STP Mini Keystone Jack Tool less

TECHNICAL DRAWING

