

## CAT.5E U/UTP PATCH CORD - CA5EUxx00L



Browse on Mobile

 Browse on Web

NEXCONEC<sup>®</sup> Category 5E U/UTP patch cords are specifically designed and manufactured to deliver robust standards-based performance ensuring optimum bandwidth for today's high-speed network applications.

Each Category 5E U/UTP patch cord exceed the minimum specified performance for Category 5E U/UTP patch cords and support all CLASS D applications.

### FEATURES

- ✓ Conform to IEC, EIA-TIA performance requirements
- ✓ Gold plated contact pins
- ✓ 24AWG premium grade copper conductor
- ✓ Snag-less Connectors
- ✓ ETL certified channel test

### APPLICATIONS

- ✓ Supports category 5E (Class D) networks running up to 100MHz applications
- ✓ Connection between wall outlets or equipment

## SPECIFICATIONS

Parameters	Units	Value
Cable OD	mm	5.4±0.2mm
Insulators Diameter	mm	0.98±0.05mm
Termination Wiring		TIA-568B (Nexconec Standard) <i>*See Cable Wiring Scheme below for other wiring method request</i>
Operating Temperature	°C	-20°C ~ +75°C
Compliance		ANSI/TIA-568-C.2, ISO 11801, IEC 60603-7, ETL Verified
RoHS Compliance		Compliant
Warranty		12 Months
Conductor		24AWG stranded copper
Insulators Material		PE - Polyethylene

## ORDER INFORMATION

Part Number	Product Description
CA5EUxx00L	Nexconec CAT5E U/UTP Patch Cord xx 00mtr LSZH
CA5EUxx00C	Nexconec CAT5E U/UTP Patch Cord xx 00mtr CM
CA5EUxx00P	Nexconec CAT5E U/UTP Patch Cord xx 00mtr PVC

**Note:**

1. "xx" is the jacket color, refer to table below


xx	color
GY	Grey
BL	Blue
BK	Black
GR	Green
YE	Yellow
PR	Purple
RD	Red

2. "00" is the length of patch cord, i.e.: 0.5 for 0.5mtr; 01 for 1mtr; 02 for 2mtr.


3. Contact NEXCONEC sales for more information now.

4. Add "X" at end of the above PN, and "Crossover" at end of the above Product Description for Crossover wiring scheme.

**CABLE WIRING SCHEME**

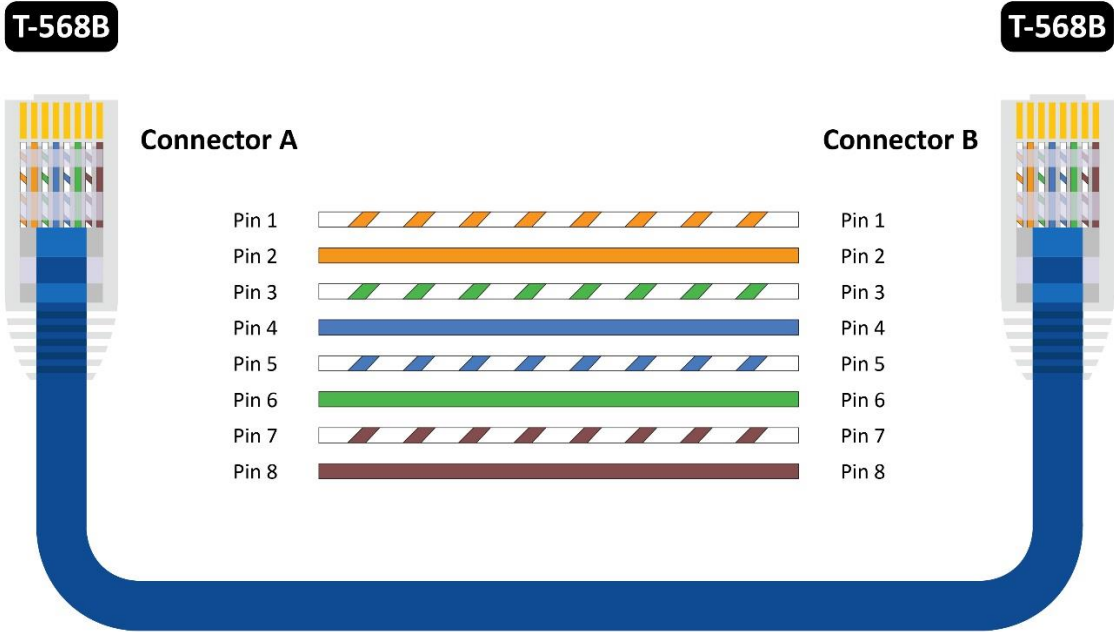

**STRAIGHT-THROUGH WIRING** (*Nexconec Standard*)

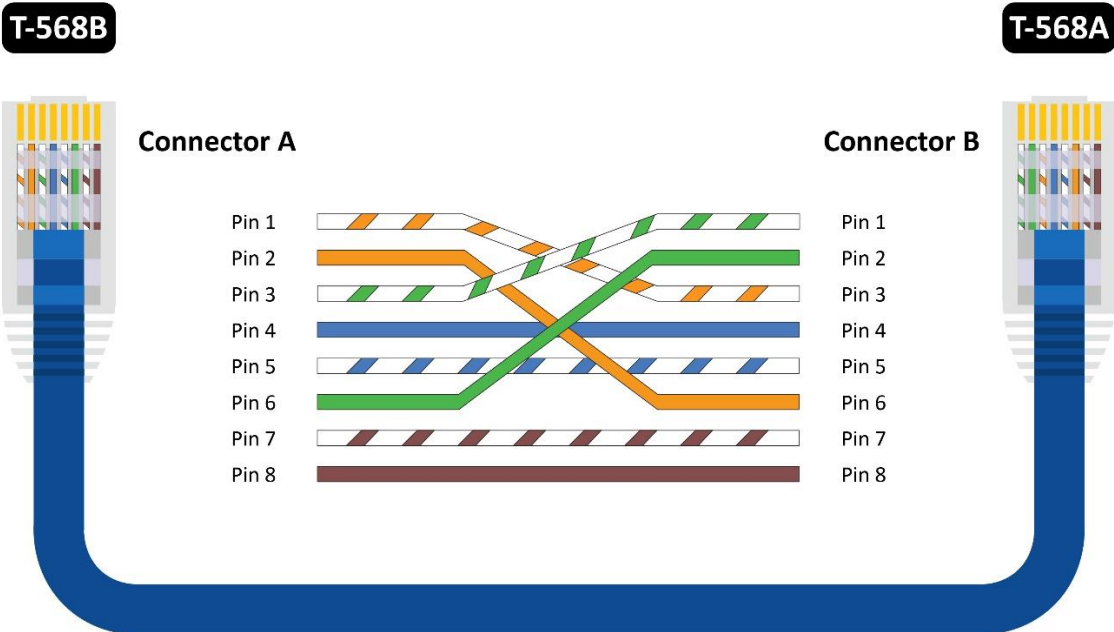

**CROSSOVER WIRING** (*On Request*)