


## HIGH PERFORMANCE OPTICAL FIBER CLEAVER - CLEAV01

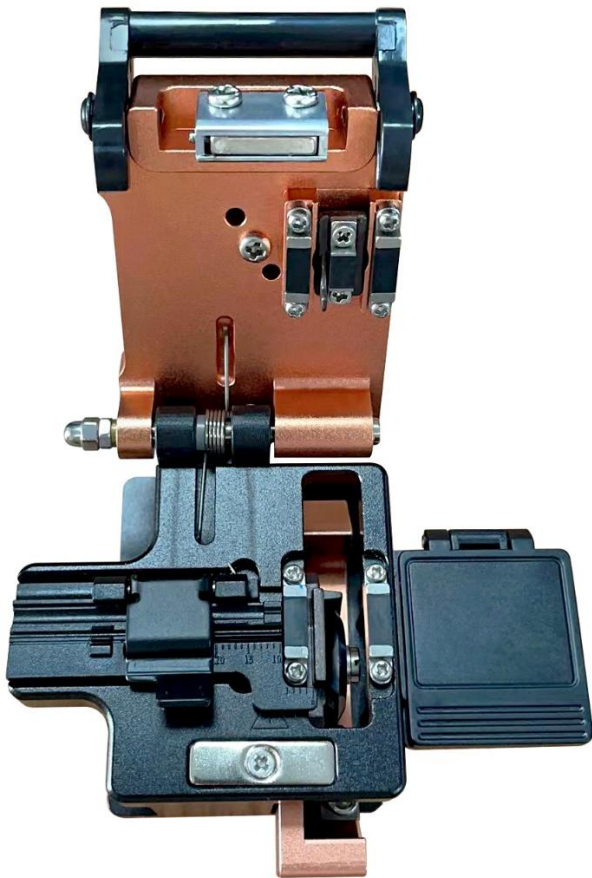

Browse on Mobile

 Browse on Web

Nexconec high performance optical fiber cleaver is available with a single fiber adapter for 250 to 900 micron coated single fibers. It is a simple operation for the user to remove or install the single fiber adapter and alternate between mass and single fiber cleaving.

### FEATURES

- ✓ With fiber collection box
- ✓ Compact body & light weight
- ✓ High Precision Cleaves
- ✓ Single mode or Multimode Use
- ✓ 16 Position Rotatable and Replicable Blade

## SPECIFICATIONS

Parameters	Value
Dimensions	62 x 60 x 60 mm
Material	Silica glass
Cladding Diameter	Ø 125um
Fiber Count	Single
Cleave Length	5~20mm (Ø 0.25) / 10~20mm (Ø 0.9)
Cleave Angle (Typ.)	0.5 degrees with single fiber
Off-Cut Collector	Optional
Single Fiber Adapter	Pre-fitted (AP-FC6M)
Field Replaceable Blade	Yes, Use FCP-20BL
Blade Life *1	48000
Weight	Approx. 380g

## ORDER INFORMATION

Part Number	Product Description
<b>CLEAV01</b>	High Performance Optical Fiber Cleaver