


25G SFP28 DAC

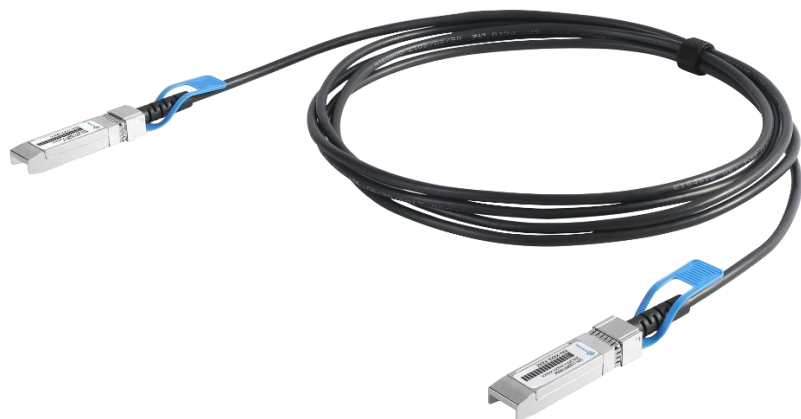

Browse on Mobile

 Browse on Web

Nexconec SFP28 Direct Attach Cables are compliant with SFF-8432 and SFF-8402 specifications. Various choices of wire gauge are available from 30 to 26 AWG with various choices of cable length (up to 5m).

FEATURES

- ✓ Up to 25.88243 Gbps data rate
- ✓ Hot-pluggable SFP 20PIN footprint
- ✓ Improved Pluggable Form Factor(IPF)
- ✓ Temperature Range: 0~ 70°C
- ✓ Compatible to SFP28 MSA, SFF-8402 and SFF-8432
- ✓ Compatible for enhanced EMI/EMC performance

APPLICATIONS

- ✓ 25G Ethernet

SPECIFICATIONS

Part Number	Package	Data Rate	Length	Cable AWG
NX-XF-DG25-01-xx	SFP28	25G	1m	30 AWG
NX-XF-DG25-02-xx	SFP28	25G	2m	30 AWG
NX-XF-DG25-03-xx	SFP28	25G	3m	30 AWG
NX-XF-DG25-04-xx	SFP28	25G	4m	26 AWG
NX-XF-DG25-05-xx	SFP28	25G	5m	26 AWG

ORDER INFORMATION

Part Number	Product Description
NX-XF-DG25-01-xx	25G SFP28 DAC 30 AWG 1m
NX-XF-DG25-02-xx	25G SFP28 DAC 30 AWG 2m
NX-XF-DG25-03-xx	25G SFP28 DAC 30 AWG 3m
NX-XF-DG25-04-xx	25G SFP28 DAC 26 AWG 4m
NX-XF-DG25-05-xx	25G SFP28 DAC 26 AWG 5m

Notes

- Where (01 = 1m, 02 = 2m, 05 = 5m etc.) denotes cable length in meters.
- Where "xx" denotes compatibility short codes. (xx = CI for Cisco, xx = DL for DELL etc.)
- Compatible Short codes are as follows:

Short codes	Value	Short codes	Value
CI	Cisco	HW	Huawei
ML	Mellanox	DK	D-Link
MK	Mikrotik	HC	H3C
JP	Juniper	CN	Ciena
BR	Brocade	EC	Edge-Core
DL	DELL	AL	Alcatel-Lucent
FT	Fortinet		