


1U SLIDING PANEL INTERCHANGEABLE FRONT ADAPTER PLATE - SPPXX

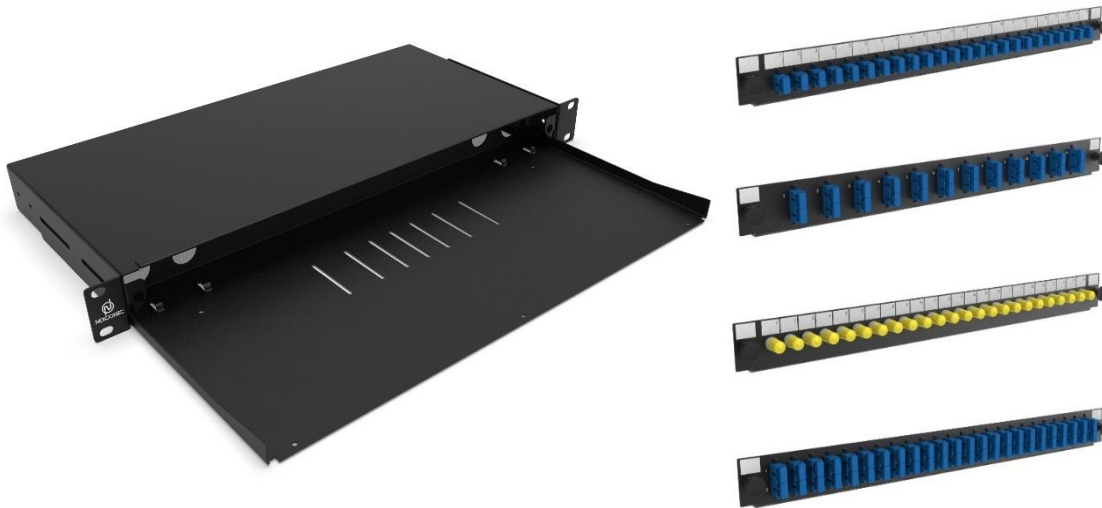

Browse on Mobile

 [Browse on Web](#)

Nexconec Interchangeable Front adapter plate and sliding patch panel permit stock reduction with these 2 parts constructions. Increased flexibility with 1 chassis in stock for all loading configuration and fiber counts within 1U. Attach the suitable front panel as per requirements.

The panel can also be pre-loaded completely with the required adapters or pre-loaded with pigtails and splice accessories. The tray is locked by 2 plastic latches and lowers to a 45deg angle when fully extended. Installation and labelling are simple and easy.

FEATURES

- ✓ Recessed panel bracket mounting
- ✓ Removable front adapter plate
- ✓ Large choice of adapters plates with LC/SC/FC/ST and LGX
- ✓ Fits standard 19" rack
- ✓ 4 Rear Cable entries
- ✓ Complete custom loading of panel with adapters, pigtails & accessories

APPLICATIONS

- ✓ Enterprise network & Datacenter
- ✓ Indoor application
- ✓ Accepts Indoor and Outdoor Pre-terminated cables and conventional Splicing



SPECIFICATION

Mounting Type	Rack 19"
Height Unit	1U
Material	Cold rolled steel
Housing Color	Black
Application	Indoor IP20
Lockable	No
Dimensions (W x D x H in MM)	482 x 205 x 44.4
Net Weight	2.5 Kg

DESIGN-HARDWARE

Opening Type	Sliding Tray
Access Type	Front access
Front Cable Management	Optional
Cable Entry Direction	Rear
Rear Cable Management	4 Cable Entries (OD: 2x PG13.5 and 2x PG16 mm)
Front Adapter Plate	SC Simplex, SC Duplex, FC & ST Simplex Footprint, LGX

ORDER INFORMATION

Product	Part Number	Product Description
	SPPXX	1U Sliding Panel No Front Patching Plate, Unloaded
	PLMP3	Adapter Plate for SPPXX Sliding Patch Panel, 3 LGX Ports Unloaded
	PL24S	Adapter Plate for SPPXX Sliding Patch Panel, 24 Ports SC SX / LC DX Unloaded
	PL24D	Adapter Plate for SPPXX Sliding Patch Panel, 24 Ports SC DX / LC QD Unloaded
	PL24F	Adapter Plate for SPPXX Sliding Patch Panel, 24 Ports FC/ST SX Unloaded
	PL12D	Adapter Plate for SPPXX Sliding Patch Panel, 12 Ports SC DX / LC QD Unloaded

CUSTOM PANEL KIT CONFIGURATOR

SPP	1	2	3	4	5
-----	---	---	---	---	---

SPP	1	2	Adapter Type	3	Fiber Count	4	Adapter Color	5	Pigtails
	PLMP3	S1	SC	12	12FO	L	Blue	A1	SM OS2 G657A1
	PL24S	S2	SC/APC	24	24FO	N	Green	O1	MM OM1
	PL24D	L1	LC	48	48FO	E	Beige	O3	MM OM3
	PL24F	L2	LC/APC			Q	Aqua	O4	MM OM4
	PL12D	F1	FC			V	Erika-V	-	No Pigtails
		S1	ST						

Panels KIT include Splice Kit (Splice Tray FSP01, Spool FSP02 and Cable Gland)

Pigtails Tight Buffer Rainbow colored per default. Add E after pigtails for **Easy strip**, Example A1E

CUSTOM ADAPTER PLATE CONFIGURATOR

PL	1	2	3
----	---	---	---

1	2	Adapter Type	2	Fiber Count	3	Adapter Color
MP3	S1	SC	12	12FO	L	Blue
24S	S2	SC/APC	24	24FO	N	Green
24D	L1	LC	48	48FO	E	Beige
24F	L2	LC/APC			Q	Aqua
12D	F1	FC			V	Erika-V
	S1	ST				

Ask sales for other products and configuration not shown. sales@nexconec.com