

## UPX ZERO RU BRACKET – **UPXBK01**



Browse on Mobile

 Browse on Web

NEXCONEC<sup>®</sup> introduces the **UPX Zero RU Bracket**, a state-of-the-art product designed to enhance your networking infrastructure. This innovative, detachable bracket offers a sleek and space-saving solution for mounting UPX Zero RU equipment effortlessly on the wall, anywhere outside the rack, to free up valuable space in your work area. The bracket installs easily and quickly, creating a convenient point for the distribution of patch cables within the vertical cabling system.

The UPX Zero RU Bracket accepts all types of Nexconec UPX range modules and adapter plates. The bracket is supplied unloaded; modules and adapter plates are supplied separately.

### FEATURES

- ✓ Zero RU detachable mounting bracket
- ✓ Wall-mountable anywhere outside the rack - plate fixes left, right, top, or bottom, in any orientation
- ✓ Easily accessible and facilitates faster installation
- ✓ Cassettes and plates locked in parked or maintenance position for easy patching
- ✓ Space saving and utilizing solutions
- ✓ 1 Slot UPX (Up to 24FO in LC, 12FO in SC, 36FO in CS, 48FO in SN)
- ✓ Modular with MPO Cassette, Splice Cassette, Pre-terminated Cassettes or Adapter plates
- ✓ Material Compliant: RoHS, REACH / SVHC
- ✓ Telecommunication Standards: TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754


## APPLICATIONS

- ✓ Datacenter storage area network & Central Office, POP
- ✓ Indoor applications, Enterprise, Campus
- ✓ Wall-mount deployments outside the main equipment rack
- ✓ Fiber or copper patching in space-constrained work areas
- ✓ Temporary or permanent maintenance access points
- ✓ Accepts Indoor and Outdoor Pre-terminated cables and MTP trunks and Splicing





## SPECIFICATIONS

| Parameters                         | Value   |
|------------------------------------|---|
| <b>Mounting Type</b>               | Wall-mountable anywhere outside the rack<br>(Plate fixes left, right, top, or bottom, in any orientation) |
| <b>Access Type</b>                 | Front access  |
| <b>Slot Type</b>                   | (Snap-in) UPX Modules and UPX Plates  |
| <b>Number of Slots</b>             | 1   |
| <b>Fiber Capacity</b>              | Up to 24FO in LC, 12FO in SC, 36FO in CS, 48FO in SN  |
| <b>Dimensions (W x D x H)</b>      | 44 x 93.7 x 135 mm  |
| <b>Height Unit</b>                 | 94.4 mm   |
| <b>Material</b>                    | Metal Part: Cold Rolled Steel   Plastic Part: PC+ABS  |
| <b>Housing Color</b>               | Metal Part: Black (RAL 9004)<br>Plastic Part: Grey Blue (RAL 5008)  |
| <b>Application</b>                 | Indoor IP20   |
| <b>Net Weight</b>                  | 0.5 KG  |
| <b>Material Compliant</b>          | RoHS, REACH / SVHC  |
| <b>Telecommunication Standards</b> | TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754  |

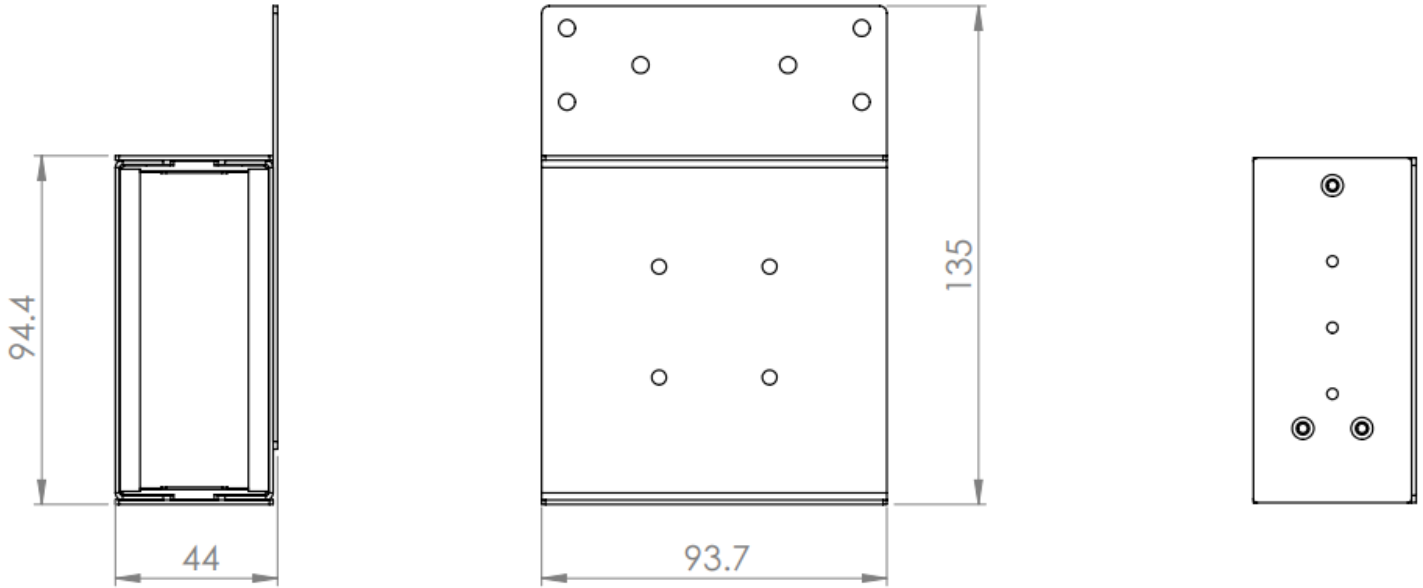
## ORDER INFORMATION

| Product   | Part Number    | Product Description                    |
|---|----------------|--|
|  | <b>UPXBK01</b> | Zero RU UPX Bracket, 1 Slot (Unloaded) |




## UNIVERSAL MOUNTING ORIENTATIONS

|   |  |
|---|--|
|   |  |
| <b>Left Mount</b>   | <b>Right Mount</b>   |
|  |  |
| <b>Top Mount</b>  | <b>Bottom Mount</b>  |

**TECHNICAL DRAWINGS**











**RELATED PRODUCTS AND ACCESSORIES**

| Product   | Part Number    | Product Description                           |
|---|----------------|---|
|  | <b>UPXCA01</b> | UPX Module MPO-LC Elite 24FO SM Pol A/C       |
|  | <b>UPXCA02</b> | UPX Module MPO-LC/APC Elite 24FO SM Pol A/C   |
|  | <b>UPXCA03</b> | UPX Module MPO-LC Elite 24FO MM OM3/4 Pol A/C |

|   |                  |   |
|---|------------------|---|
|    | <b>UPXCA04F</b>  | UPX Module Front MPO-LC/UPC Elite 12FO SM Pol A/C                 |
|    | <b>UPXCA05F</b>  | UPX Module Front MPO-LC/APC Elite 12FO SM Pol A/C                 |
|    | <b>UPXCA06F</b>  | UPX Module Front MPO-LC/UPC Elite 12FO MMF OM3/4 Pol A/C          |
|    | <b>UPXCA07QF</b> | UPX Module Front MPO-LC/UPC Elite 16FO SM Pol B                   |
|   | <b>UPXCA08QF</b> | UPX Module Front MPO-LC/APC Elite 16FO SM Pol B                   |
|  | <b>UPXCA09QF</b> | UPX Module Front MPO-LC/UPC Elite 16FO MMF OM3/4 Pol B            |
|  | <b>UPXSP01</b>   | UPX Splice Module LC/UPC 24FO Pigtailed SM, Shuttered Ports       |
|  | <b>UPXSP02</b>   | UPX Splice Module LC/APC 24FO Pigtailed SM, Shuttered Ports       |
|  | <b>UPXSP03</b>   | UPX Splice Module LC/UPC 24FO Pigtailed MM OM3/4, Shuttered Ports |
|  | <b>UPXSP04</b>   | UPX Splice Module SC/UPC 12FO Pigtailed SM                        |

|   |                 |   |
|---|-----------------|---|
|    | <b>UPXSP05</b>  | UPX Splice Module SC/APC 12FO Pigtailed SM                |
|    | <b>UPXSP06</b>  | UPX Splice Module SC/UPC 12FO Pigtailed MM OM3/4          |
|    | <b>UPXSP07F</b> | UPX Module Front Splice LC/UPC 12FO Pigtailed SMF OS2     |
|    | <b>UPXSP08F</b> | UPX Module Front Splice LC/APC 12FO Pigtailed SMF OS2     |
|    | <b>UPXSP09F</b> | UPX Module Front Splice LC/UPC 12FO Pigtailed MMF OM3/OM4 |
|  | <b>UPXPL01</b>  | UPX Adapter Plate LC 24FO SM Blue                         |
|  | <b>UPXPL02</b>  | UPX Adapter Plate LC/APC 24FO SM Green                    |
|  | <b>UPXPL03</b>  | UPX Adapter Plate LC 24FO MM Aqua                         |
|  | <b>UPXPL03V</b> | UPX Adapter Plate LC 24FO MM Erika Violet                 |
|  | <b>UPXPL04</b>  | UPX Adapter Plate 6x SC Duplex, 12FO SM Blue              |
|  | <b>UPXPL05</b>  | UPX Adapter Plate 6x SCA Duplex, 12FO SM Green            |

|   |                 |  |
|---|-----------------|--|
|    | <b>UPXPL06</b>  | UPX Adapter Plate 6x SC Duplex, 12FO MM Aqua               |
|    | <b>UPXPL06V</b> | UPX Adapter Plate 6x SC Duplex, 12FO MM Erika Violet       |
|    | <b>UPXPL11</b>  | UPX Adapter Plate 12 Ports MTP®/MPO Duplex Key Up/Key Down |
|    | <b>UPXPL21</b>  | UPX Adapter Plate 12 Ports MTP®/MPO Duplex Key Up/Key Up   |
|    | <b>UPXPL30</b>  | UPX Adapter Plate CS® 36FO (18 Channels) SM Blue           |
|   | <b>UPXPL31</b>  | UPX Adapter Plate CS®/APC 36FO (18 Channels) SM Green      |
|  | <b>UPXPL40</b>  | UPX Adapter Plate SN® 48FO (24 Channels) SM Blue           |
|  | <b>UPXPL41</b>  | UPX Adapter Plate SN®/APC 48FO (24 Channels) SM Green      |

\* Add **-SH** at the end of Part Number for Shuttered dustproof LC/SN/CS adapters.