


42U 19" ODF RACK - ODF-TCxx



Unloaded Rack

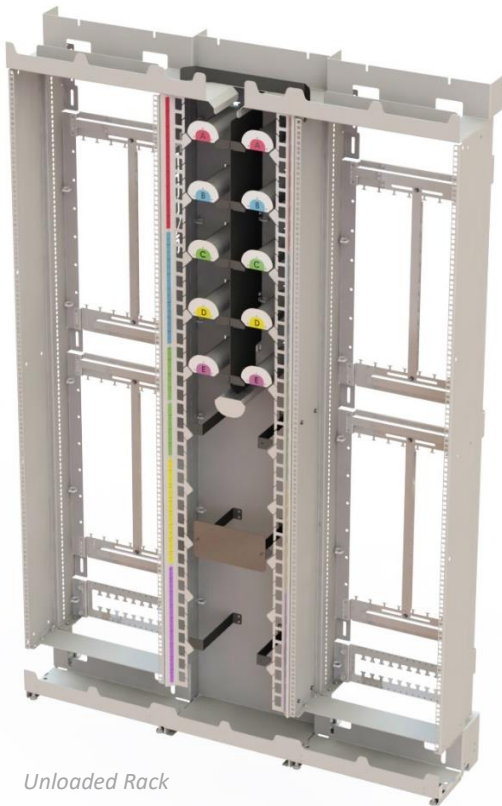

Loaded Rack




Browse on Mobile

 [Browse on Web](#)

NEXCONEC[®] 42U 19" ODF Rack, optical distribution terminal is an evolving and modular container. Its main advantages are the reduced footprint compared to other solutions on the market, the multiple configurations to meet the needs of operators, and ability to align several line-up style mutualization points. Which makes it real value for money.

Quick, Easy and Time saving installation, the rack is delivered in 3 pre-assembled modules.

FEATURES

- ✓ Time saving installation with 3 pre-assembled modules
- ✓ Intelligent Patch Cord Management Module
- ✓ 11 drums for an "M" brewing according to ARCEP recommendations
- ✓ Intuitive color-coded and numbered U connectors
- ✓ Multiple configurations to meet the needs of operators and ability to align several LINE UP style mutualization points
- ✓ Possibility to add an additional splitter/cable support plate (optional)
- ✓ Possibility to add high protection caps for the high flow jumpers (optional)
- ✓ Made in  FRANCE

APPLICATIONS

- ✓ FTTx Networks, Datacenter, Enterprise
- ✓ Data communication Networks
- ✓ Optical Sub-division/Mutualization Point
- ✓ Indoor Application

SPECIFICATIONS




Parameters	Value
Dimensions (HxWxD)	Full: 2200 x 1400 x 300 mm (~108 Kg) Lateral: 2200 x 490 x 300 mm (~35 Kg) Central: 2200 x 420 x 300 mm (~38 Kg)
Material	Cold Rolled Steel
Housing Color	Grey - RAL 7035 (other optional RAL)
Height Unit	42U
Mounting Type	Standard 19" Rack
Capacity	Up to 800 subscribers Up to 2 x 42U 19" units Up to 12 cables or 8 splitters (per 19" cell)
Application	Perfect for SRO applications

ACCESSORIES INCLUDED

No.	Particulars	Quantity
1	Lateral modules (cells) 42U 19" (on left and right sides)	2 cells
2	Pre-mounted splitter support plates (or cable fixing) (1 per cell)	2 cells
3	Pre-mounted guide rings for the management of the rear flow of drawers	1 set
4	Central patch cord management module	1 module

5	Intelligent «M» management of patch cord overlengths	11 drums
6	Integrated guide rings for horizontal drawer exit management	2x42 pcs
7	Isolated zone for secure patch cord guide	1 pc
8	Screws and bolts	1 set
9	Assembly instructions	1 set


ORDER INFORMATION

Product	Part Number	Product Description
	ODF-TC01	Complete 3 Modules 42U 19" ODF Rack
	ODF-TC02	1 Module 42U 19" ODF Rack
	ODF-TC03	1 Module 42U Cable Management

RELATED PRODUCTS AND ACCESSORIES

Product	Part Number	Product Description
	TRBR01	Fiber Transition Breakout Unit
	TRBR04	Mini Fiber Transition Breakout Unit
	TUBE5-50	Corrugated Conduit (Ø 5mm, Inner Ø 3.1mm) Roll of 50 meter
	PIV01	1U 48 Ports SC Simplex/LC Duplex Pivot Patch Panel (Black)
	PIV03	3U 144 Ports SC Simplex/LC Duplex Pivot Patch Panel (Black)

ADVANTAGES

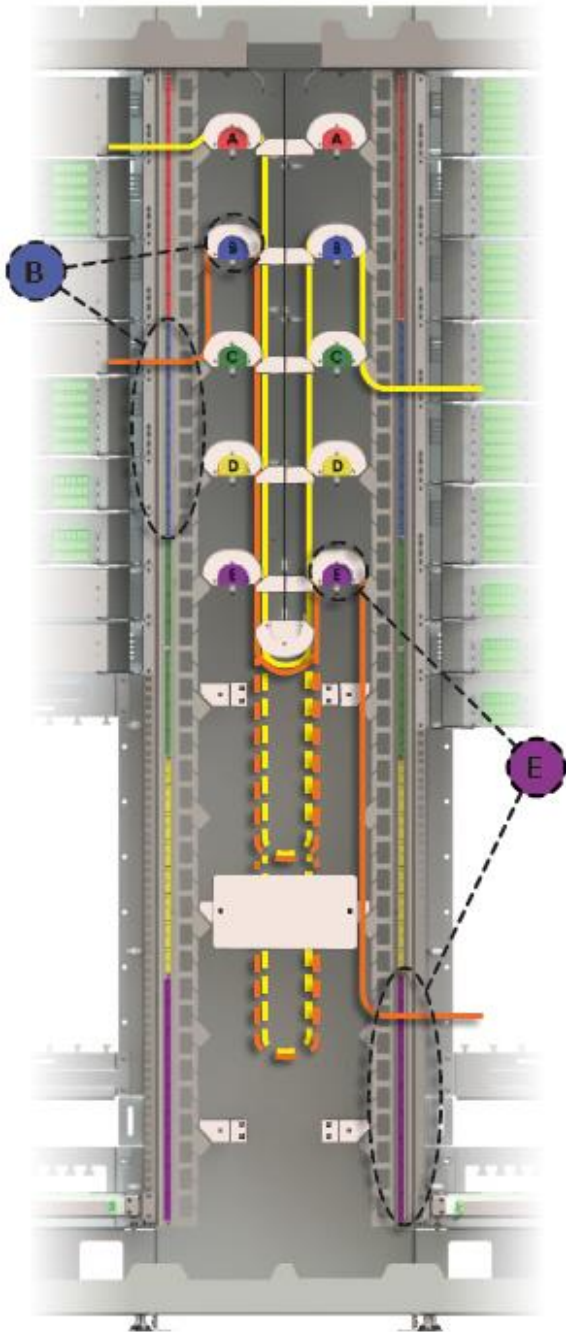

SMART PATCHCORD MANAGEMENT

The left drawer is in the **blue** part (B), so pass the patch cord over the **blue** drum (B) on the left, then pass under the central inverted drum, then pass over the **purple** drum (E) on the right, since the right drawer is in the **purple** part (E).

MANY ADVANTAGES

